




TITAN Trainer Equine Treadmill (2-year parts guarantee)

In order to compete effectively, horses must be in top physical condition. An equine treadmill is a safe and efficient method to exercise your horses whether you are developing or maintaining the horse's fitness or rehabilitating from an injury.

One of the best aids to reach this top form is the new *TITAN Trainer Equine Treadmill*. The *TITAN Trainer Equine Treadmill* is a heavy duty equine treadmill built in Canada that outperforms the competition for features, ease of use, safety, and durability. Each unit is fully equipped with an integrated Polar Heart Rate monitoring system and data collection system. The *TITAN Trainer Equine Treadmill* is supplied with the PC based *TITAN Trainer Reporting Tool* for analysis of this logged data. A user friendly color touch screen enables access to all functions of the computerized treadmill so you can have your horses training at optimum level in no time.

Each *TITAN Trainer Equine Treadmill* is backed with the industry-leading 2-year guarantee on all parts, including the belt!

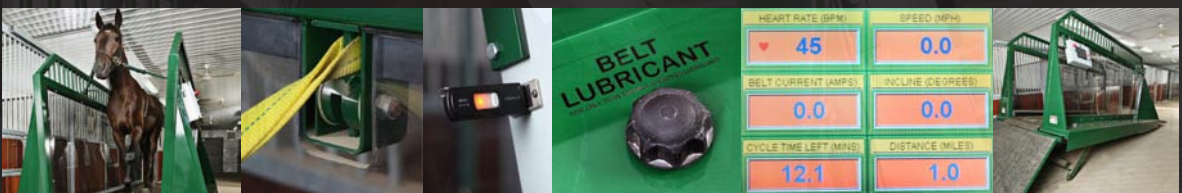

See the *TITAN Trainer Equine Treadmill* in action for yourself by checking out the new detailed video online at www.chadwickengineering.com. For full details, including pricing, please contact Chadwick Engineering.

Chadwick
Engineering Ltd.

633 Norris Court, Kingston, Ontario, Canada K7P 2R9
www.chadwickengineering.com
 613-384-2866

TITAN Trainer Equine Treadmill

Features

- Wireless Heart Rate Monitoring System
- Automatic Belt Lubrication System
- User friendly controls with LCD Color Touch Screen Display
- Selection and storage of up to 40 Horse Names
- Selection and storage of 20 User Configured Programs
- Automatic and Manual Modes of Operation
- Data Logging including Date, Time, Horse Name, Program Number, Speed, Incline & Heart Rate
- TITAN Trainer Reporting Tool to view and analyze logged data
- Welded Tubular Steel Construction with Industrial Anti-Corrosion Paint System
- Durable Transparent Polycarbonate Side Panels with UHMW Polyethylene Hoof Guards.
- Energy Absorbing Wide Deck
- Full Width Ramps covered with Durable Non-slip Mini-Cleat Belting
- Durable Long Life Belt (even with sharp shod horses)
- Spring Assisted Lift on Entry Ramp and manure collection tray for easy cleaning.
- Warranty – Two years on all parts (consumables not included, i.e. Belt Lubricant)

Specifications

	Model	
	Standard	High Speed
Overall Dimensions (with ramps)	20'-9" L x 6'-4" W x 6'-7" H 6.32 m x 1.93 m x 2.00 m	
Deck Dimensions	3' Wide x 10' Long 0.91 m Wide x 3.05 m Long	
Height (above deck)	5'-2" (1.57 m)	
Weight	3500 lbs (1590 Kg)	
Incline	0 to 8 degrees	
Incline HPU Motor	1 HP	
Electrical Voltage	208 - 230 VAC, 1 Phase	
Current	35 amp.	50 amp.
Speed	0 to 10 mph	0 to 15 mph
Belt Drive Motor	7.5 Hp (5.6 KW)	10 Hp (7.5 KW)
Ambient Operating Temperature	40 to 104 °F (5 to 40 °C)	

Safety Features

Stop when Emergency Stop Pushbutton depressed.

Stop when Tail Strap Overload tripped.

Stop when Stumble Sensor activated.

Chadwick
Engineering Ltd.

633 Norris Court, Kingston, Ontario, Canada K7P 2R9

www.chadwickengineering.com

613-384-2866